



FRONT ELEVATION

GENERAL NOTES:

GALVANIZED FLASHING (26 GAUGE) AT ALL VALLEYS, HIPS AND RIDGES. PROVIDE FOR VENTILATION PROJECTIONS THRU ROOF WITH FLANGES AND EXTEND 8" BEYOND SLEEVE.

GALVANIZED IRON FLASHING AT ALL ROOF TO WALL AND ROOF TO CHIMNEY INTERFACES.

ROOF GUTTERS AND DOWN SPOUTS PER SPECIFICATIONS SEE BUILDER.


CONTINUOUS GALVANIZED IRON EAVE FLASHING.

ATTIC VENTILATION TYPE AND AMOUNT PER SPECIFICATIONS SEE BUILDER.

APPLIED CRICKET ROOFING SHALL BE APPLIED OVER MAIN ROOF DECK AND FRAME.

ROOF PLATE HEIGHTS SHOWN ARE AT EXTERIOR FRAME WALL CONDITIONS, ADJUST ROOF PLATE HEIGHT FROM HEIGHT SHOWN AT CONDITIONS WHERE THE ROOF IS SUPPORTED BY BEAMS CENTERED OVER LOAD BEARING COLUMNS.

12'-0" PLT. HT.

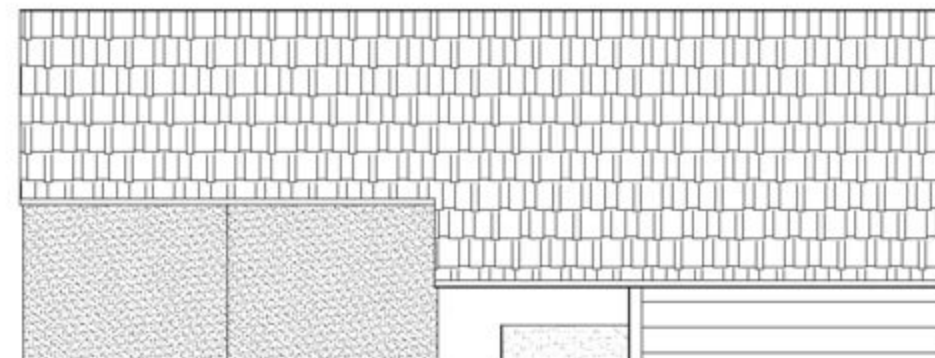





FRONT ELEVATION



REAR ELEVATION

GENERAL NOTES:

GALVANIZED FLASHING (26 GAUGE) AT ALL VALLEYS, HIPS AND RIDGES. PROVIDE FOR VENTILATION PROJECTIONS THRU ROOF WITH FLANGES AND EXTEND 8" BEYOND SLEEVE.
GALVANIZED IRON FLASHING AT ALL ROOF TO WALL AND ROOF TO CHIMNEY INTERFACES.
ROOF GUTTERS AND DOWN SPOUTS PER SPECIFICATIONS SEE BUILDER.
CONTINUOUS GALVANIZED IRON EAVE FLASHING.
ATTIC VENTILATION TYPE AND AMOUNT PER SPECIFICATIONS SEE BUILDER.
APPLIED CRICKET ROOFING SHALL BE APPLIED OVER MAIN ROOF DECK AND FRAME.
ROOF PLATE HEIGHTS SHOWN ARE AT EXTERIOR FRAME WALL CONDITIONS. ADJUST ROOF PLATE HEIGHT FROM HEIGHT SHOWN AT CONDITIONS WHERE THE ROOF IS SUPPORTED BY BEAMS CENTERED OVER LOAD BEARING COLUMNS.

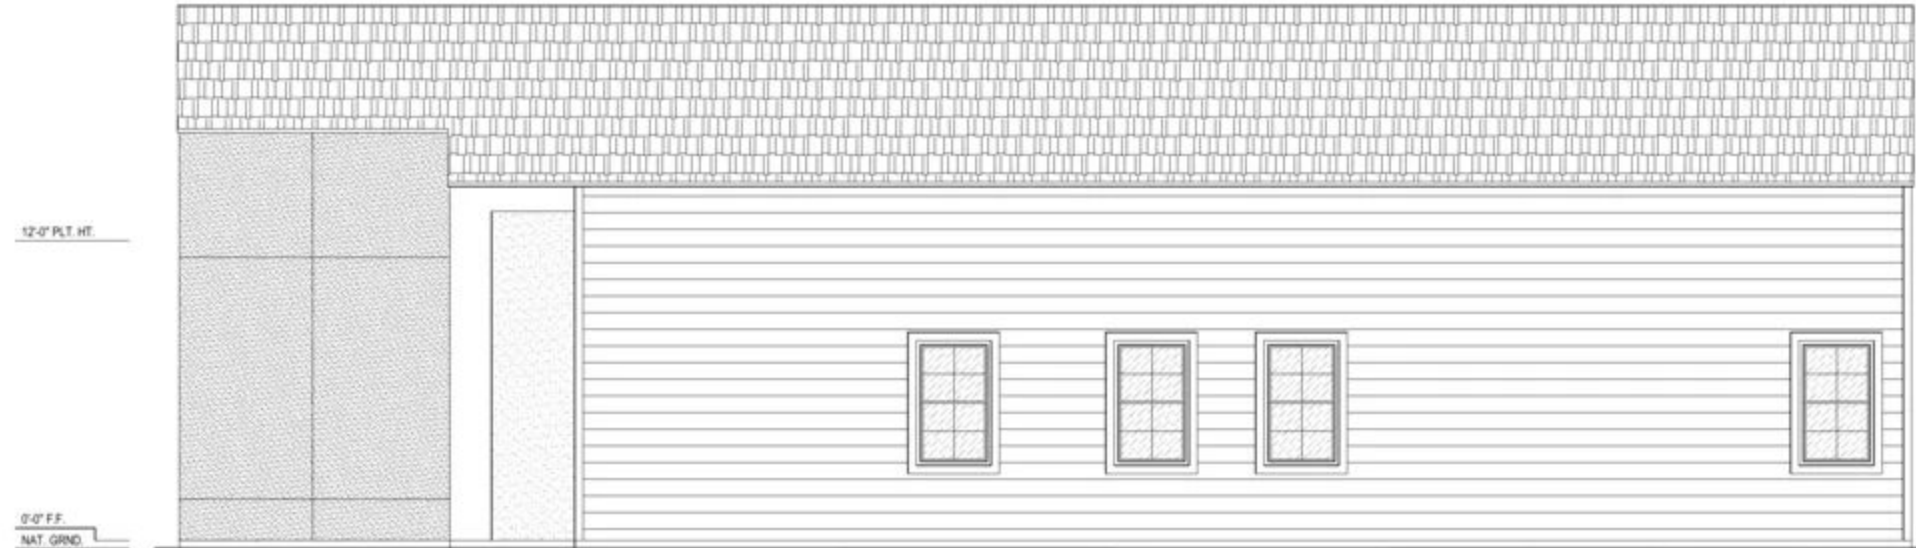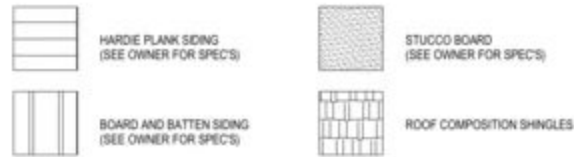


RIGHT ELEVATION

1ST FLOOR RIGHT ELEVATION TOTAL WALL OPENING PERCENTAGE CALCULATION:
 $104 \text{ SF (TOTAL AREA OF OPENINGS)} / 830 \text{ SF (TOTAL WALL AREA)} \times 100 = 12.53\%$
 $12.53\% < 25\%$


ROOF SLOPE NOTES:

FOR ROOF SLOPES OF 4:12 OR GREATER, 1 LAYER OF 15 LB FELT,
FOR ROOF SLOPES FROM 2:12 TO 4:12, 2 LAYERS OF 15 LB FELT,
FOR ROOF SLOPES UNDER 2:12, ASPHALT SHINGLES ARE NOT ALLOWED.

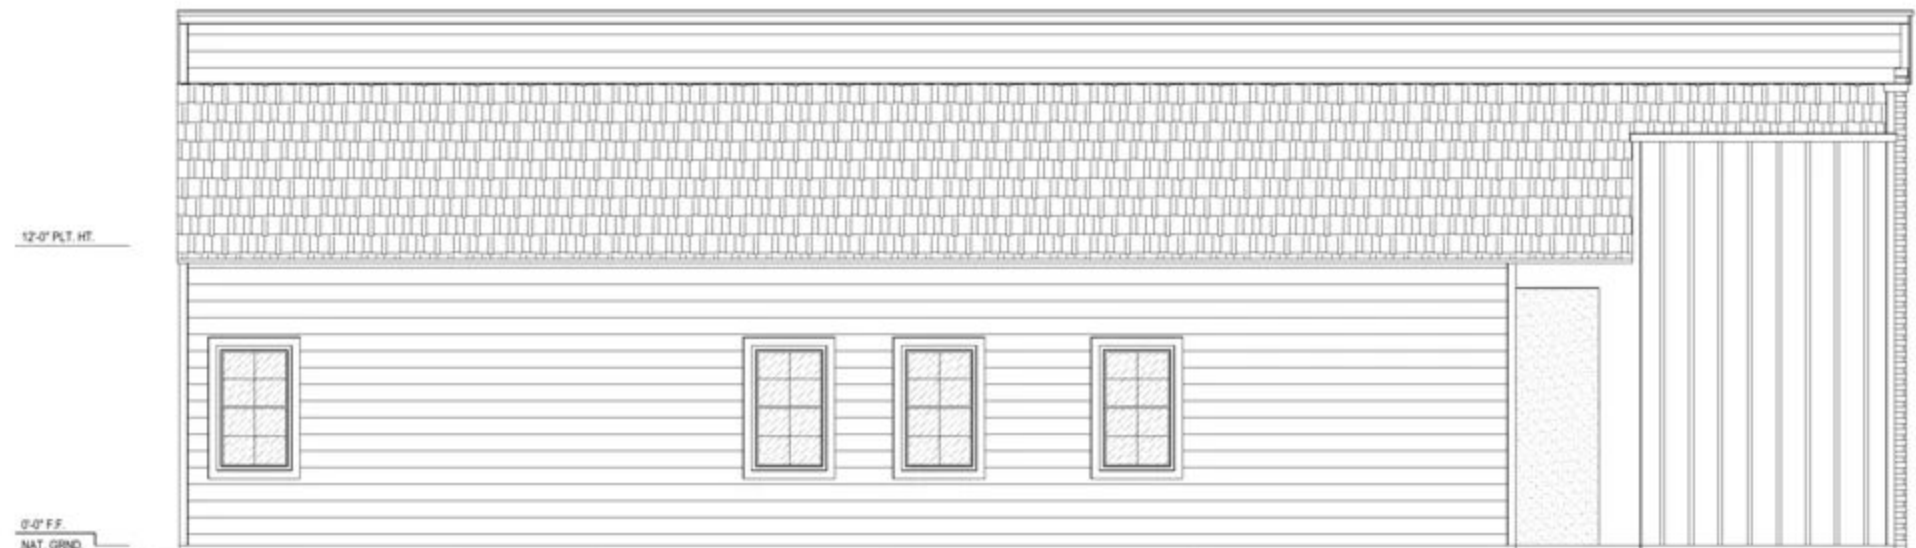


LEFT ELEVATION

1ST FLOOR LEFT ELEVATION TOTAL WALL OPENING PERCENTAGE CALCULATION:
 $95 \text{ SF (TOTAL AREA OF OPENINGS)} / 662 \text{ SF (TOTAL WALL AREA)} \times 100 = 14.35\%$
 $14.35\% < 25\%$

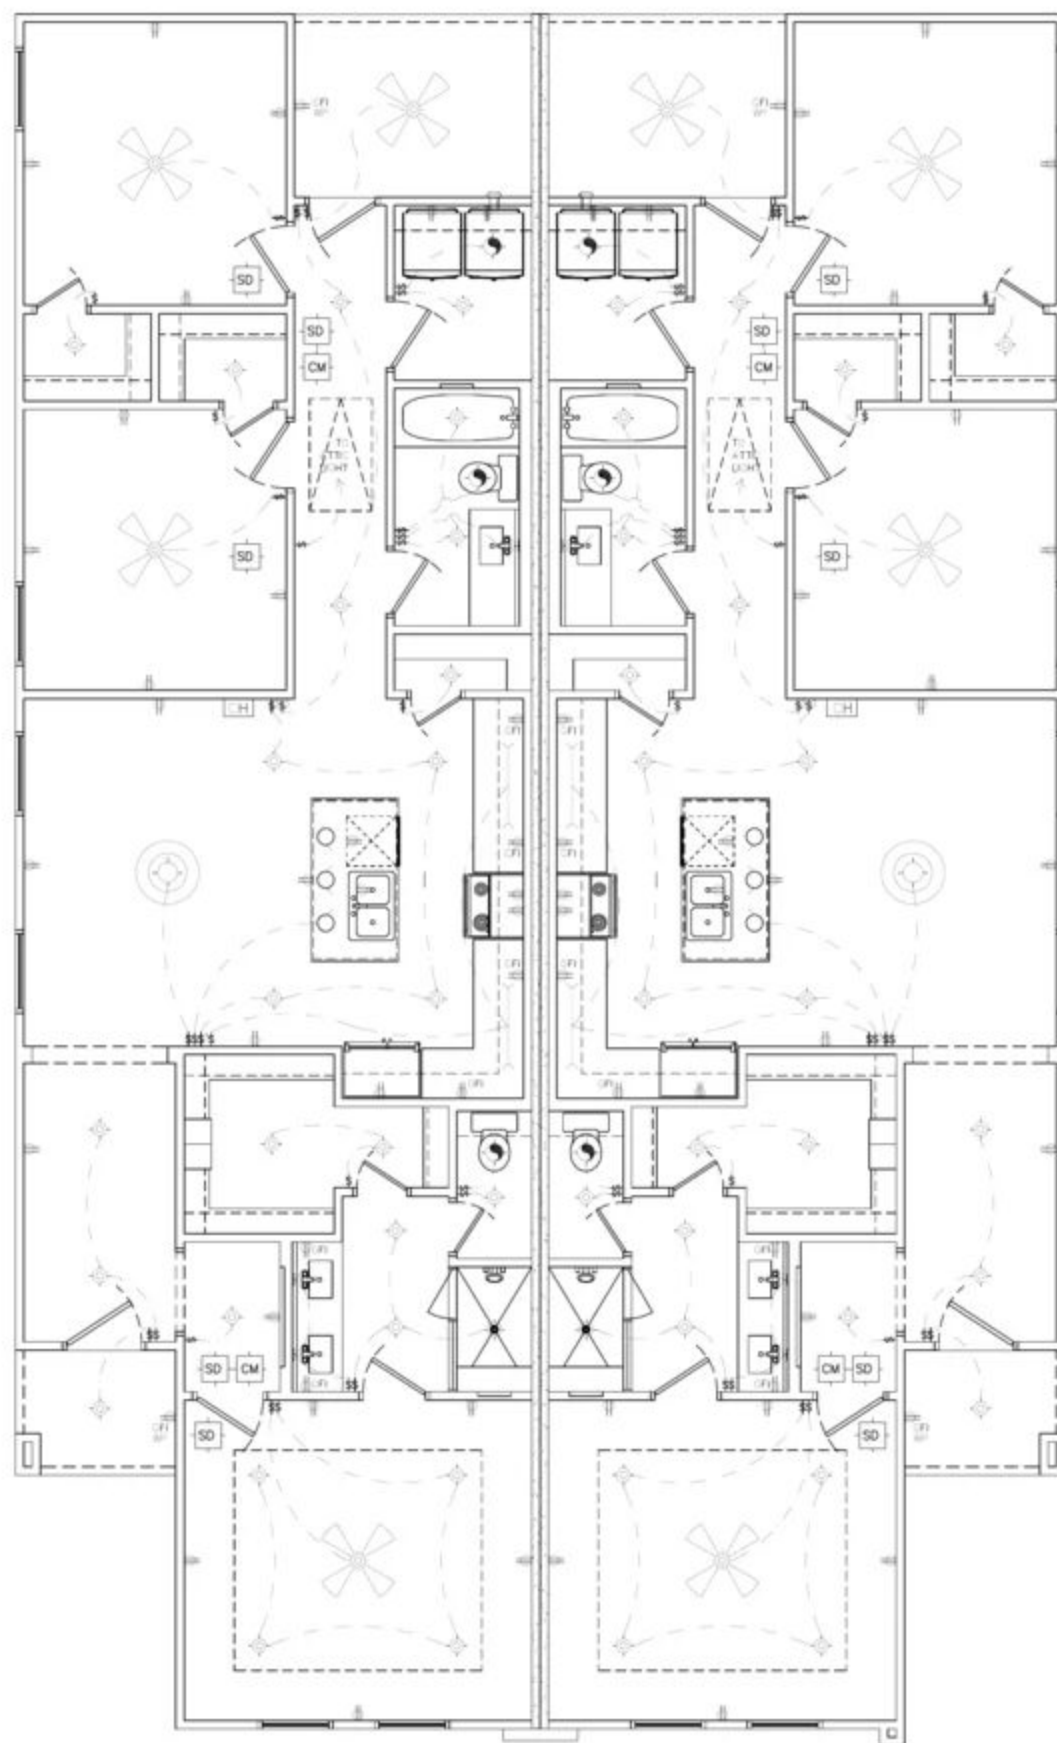

ELECTRICAL LAYOUT

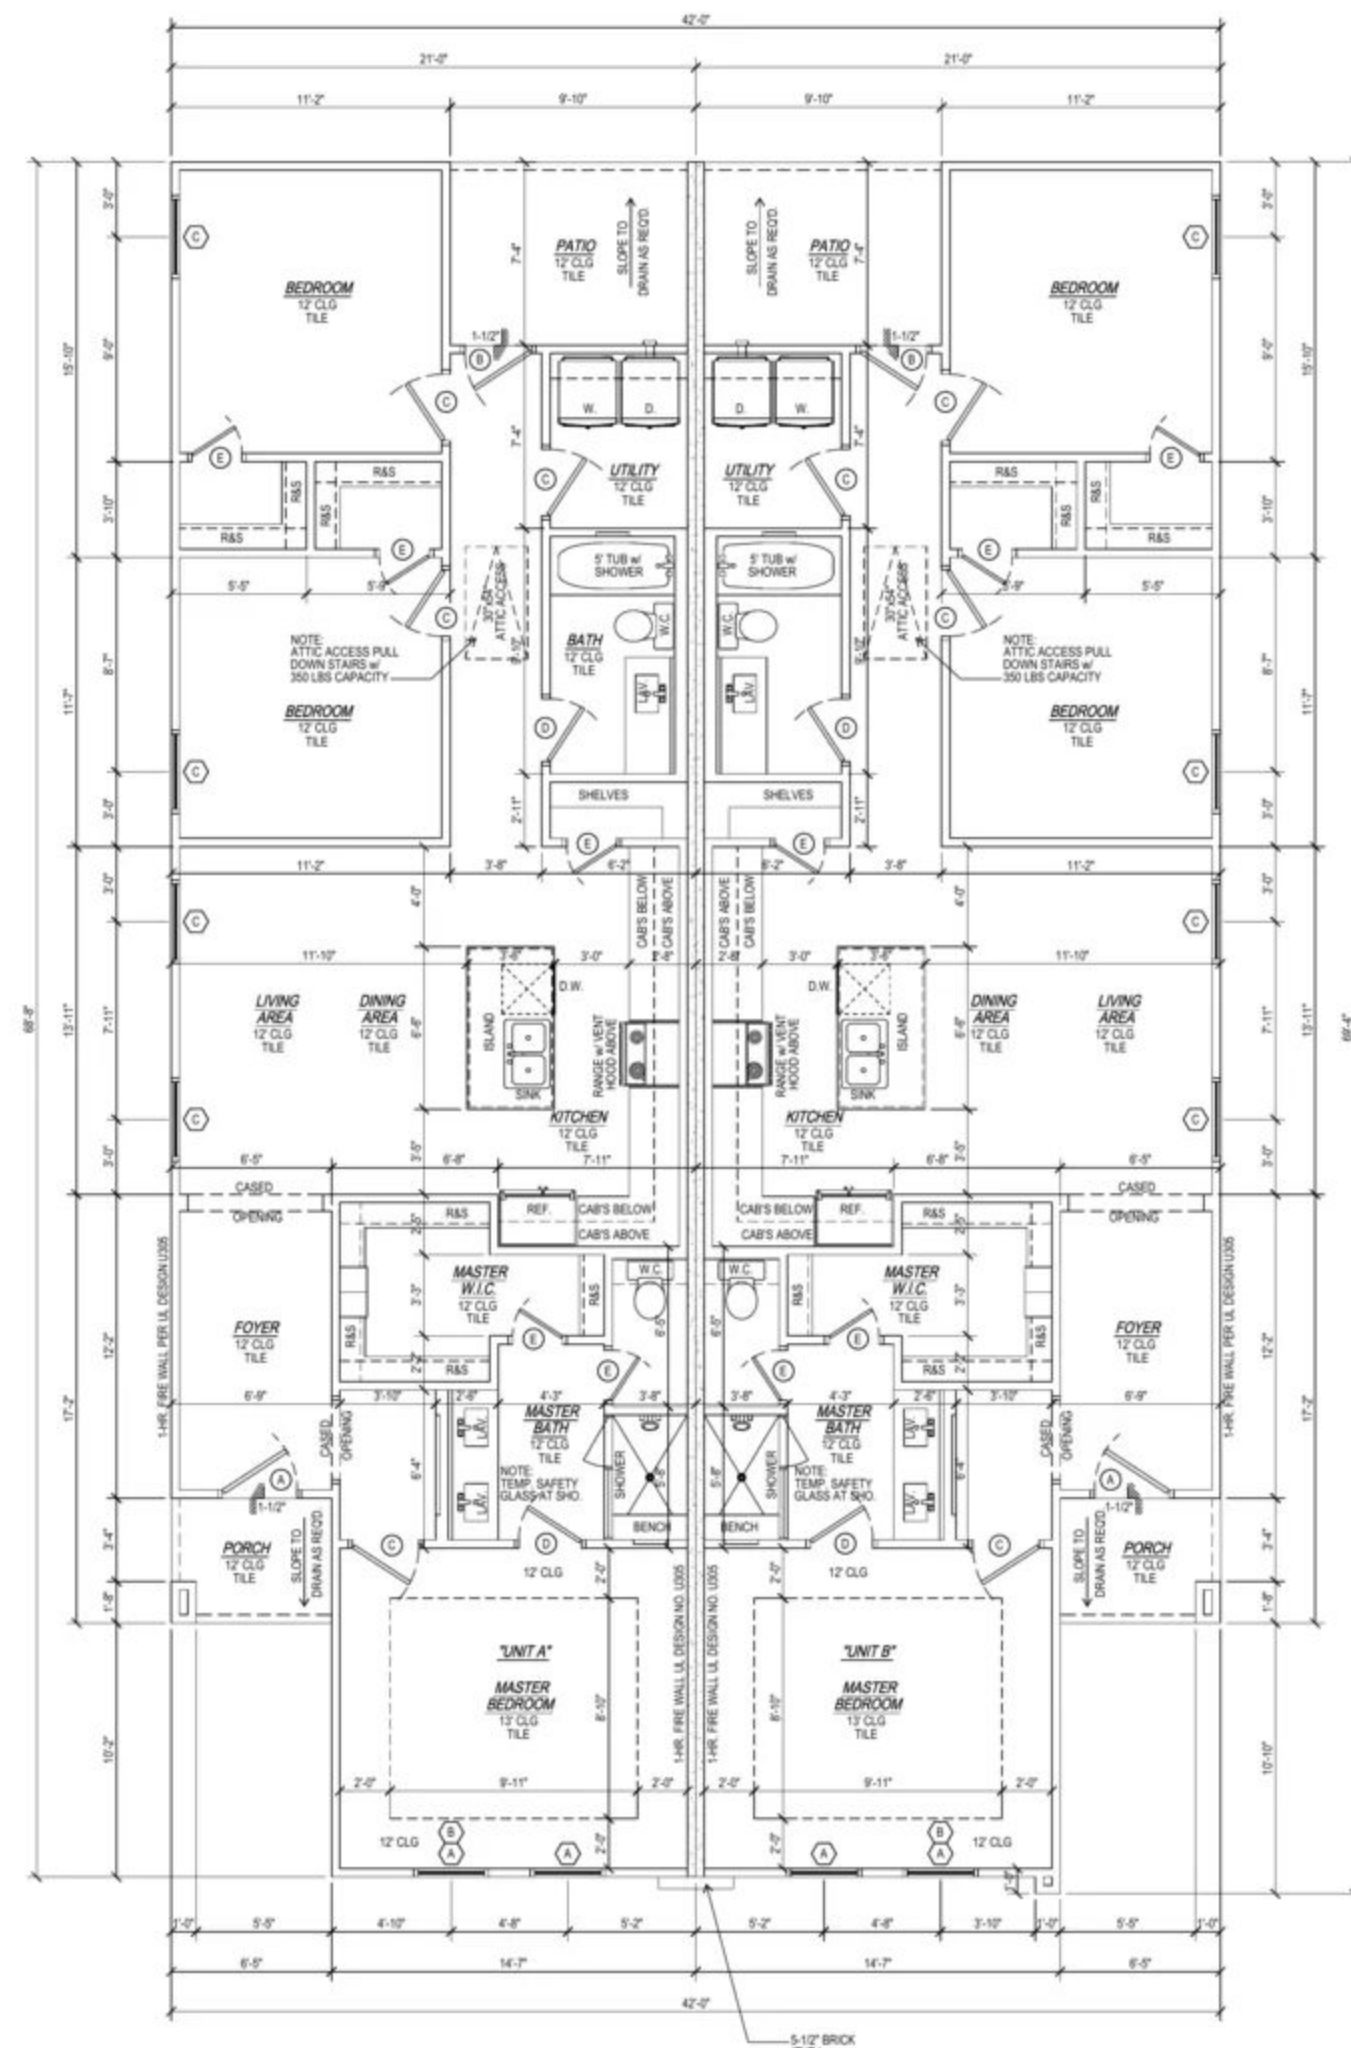

FLOOR PLAN
SCALE: 1/4"=